



3A3 Series 3/2 Way Air Control Valve



3A 310系列
3A 310 series




3A 320系列
3A 320 series

Specification

型号Model	3A310-08	3A320-08	3A310-10	3A320-10
工作介质/ Fluids	经过滤的压缩空气 / The constrigent after filtered			
动作方式 / Operation	外气控/ Exterior Control			
位置数 / Position	二位三通/ 2 Way			
有效截面积 / Efficient Sectional Area	25mm ² (CV=1.4)		30mm ² (CV=1.68)	
接管螺纹/ Port Thread	进气/Supply=排气/Export=排气/Exhaust=G1/4		进气/Supply=排气/Export=排气/Exhaust=G3/8	
润滑/ Lubrication	不需要/Not Required			
使用压力 / Operating Pressure	0.15~0.8MPa			
最大耐压力/ Max Pressure	1.2MPa			
工作温度 / Operating Temperature	-5~60			
最高动作频率/ Max Frequency	每秒五次/ 5 Times Per Second			
寿命/Life	2500万次/25 Million			


Product Code System

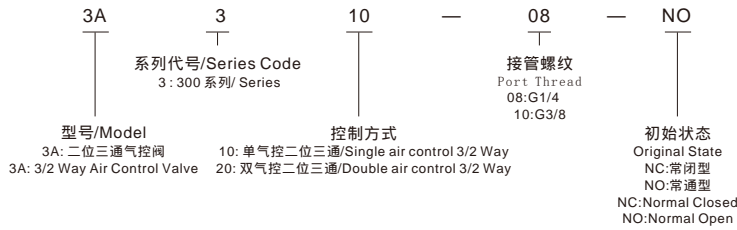

Example


For the order of double air control 3/2 way normal closed type 3A3 series air control valve which port thread is 1/4, the correct order code is: 3A320-08-NC

Symbol



Dimensions

3A310-10(08)

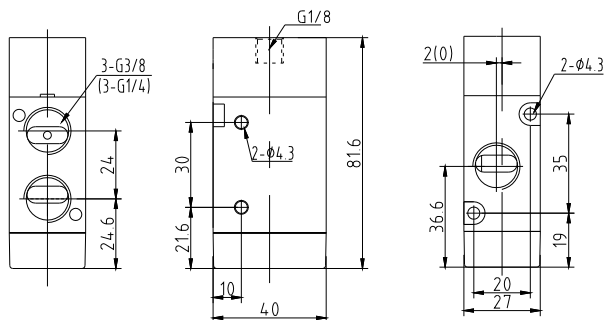

3A320-10(08)

